

V & W Series

5-15 HP OIL-LESS RECIPROCATING AIR COMPRESSOR SYSTEMS

► Clean
Compressed Air



► Medical and
Industrial Packages



► All Units Built to
ISO 9001 Standards



CHAMPION[®]

A Gardner Denver Product

Always be one.

Oil-Less Air Compressors

NEW TECHNOLOGY CREATES NEW APPLICATIONS

With the perfection of oil-less air technology by Champion, new applications are being developed everyday:


- ▶ Medical Complexes
- ▶ Laboratories
- ▶ Consumer Use
- ▶ Waste Water Facilities
- ▶ Ozone Generation
- ▶ Steel/Coke Processing
- ▶ Chemical Processing
- ▶ Electronics Production

- ▶ Food Processing
- ▶ Instrument Manufacturing
- ▶ Pharmaceutical Production
- ▶ Research Facilities
- ▶ Plastics Manufacturing
- ▶ Aquariums/SCUBA
- ▶ Beverage Dispensing
- ▶ Theme Parks
- ▶ Aviation

Champion Medical Air Systems meet NFPA99 standard requirements for medical air compressors.

NFPA was created in 1896 as a standards making body. Today, over 66,000 fire safety professionals belong to the NFPA, the world's largest and most influential fire safety organization.

NFPA has published almost 300 codes and standards with the mission of preventing the loss of life and property. Topics include fire prevention equipment, extinguishing systems, inspection, residential and commercial dwellings, safety of flammable gases, and the very important National Electrical Code.



Champion Oil-less Compressors are designed to meet the most precise standards for compressed air purity in industrial and institutional applications. With advanced design features and a system that combines quality, durability and state-of-the-art lubrication technology, the V & W Series offers freedom from oil... freedom from maintenance...freedom from noise...freedom from worry!

The concept is simple: No oil in the compressor equals no oil in the air. All oil, even in the crankcase, is eliminated. The unique design of the V & W Series assures the long life and productivity you've come to expect from Champion.

Champion Meets the Need

The need was already there: Find a reliable way to completely eliminate any oil getting from the compressor into the delivered air stream. Champion met the challenge by applying new technology, new materials and new manufacturing techniques to our compressor design. Internal moving parts in the Champion Oil-less design are protected from wear without conventional lubrication. Crankshaft and rod bearings are lubricated by exclusive sealed, solid synthetic lubricants. Pistons move on alloyed heat-resistant filled PTFE guide and compression rings. The result is low maintenance, high durability and pure, oil-less air!

Clean Compressed Air

Champion has always been at the forefront of air compressor technology. Champion V & W Series oil-less compressors are no exception. We offer 100% duty cycle, sealed anti-friction bearings and filled PTFE rings.

Champion's continuing program of product research and development assures that your Champion compressor includes the latest advancements in oil-less technology. We can design and build a system that meets your demand.

Heart of a Thoroughbred...

Oil-Less Compressed Air Applications

Air that is produced by oil-less compressors is used to drive pneumatic devices in surgical areas, critical care areas, nurseries, operating rooms, intensive care, post operative care, emergency rooms and hyperbaric chambers.

OPTIONAL FEATURES

A wide selection of configurations and options allows you to customize the compressor system to your specific needs:

- ▶ Control Panel
- ▶ Fusible Disconnect Switches
- ▶ Automatic Tank Drain
- ▶ Flexible Discharge Line
- ▶ Vibro-Isolators
- ▶ Vinyl-Lined or Galvanized Receivers
- ▶ Water-Cooled Aftercooler
- ▶ Remote Intake Air Filter/Silencer
- ▶ High Temperature Shutdown/
Lag Compressor Alarm
- ▶ Air Dryer and Bypass Piping
- ▶ Downstream Filter Banks and
Indicator Gauges

Leading Edge Technology Delivered With Responsive, Local Service

From air intake to end use, Champion can supply all the components and systems needed for your oil-less compressor application. We're a complete systems designer, manufacturer, and supplier.



When you work with Champion you get the best of both worlds. Utilizing powerful CAD systems, our application engineers will work closely with you to develop specifications and build a system to meet your needs. In turn, all installation and service is handled by locally-based representatives and distributors who are well versed in compressor technology. We maintain a worldwide sales and service network to support this effort.

No one else has the experience or scope to design, build and maintain

complete air management systems for medical, institutional and industrial use. Count on Champion to be your single source for oil-less air compressor technology.

All Champion medical air systems meet current NFPA99 standards for health care facilities. Staying abreast of the changing regulations and requirements for medical compressed air systems is a high priority at Champion.

Our Unique Medical Compressors System


We Take a Systems Approach to Your Compressed Air Management Needs

Champion understands that your medical facility's oil-less compressor is part of a more comprehensive air management system. That's why we supply complete air compressor packages that can include air dryers, specialized filter banks, dewpoint/CO monitor, and complete controls.

Our approach to medical compressor system design is unique. Rather than offering a single, large system, we offer smaller, multiple-compressor units connected to a single air receiver. This energy-saving design means that you have maximum air delivery only when you need it. You have the flexibility of single unit operation alternating between compressors or multiple-compressor operation, depending on air demand.

This redundant design assures that you always have a reliable source of compressed air and the small footprint of our oil-less packages saves valuable floor space and allows for easy installation.

- ▶ Filter Bank
- ▶ PRV Station
- ▶ Bypass Valve

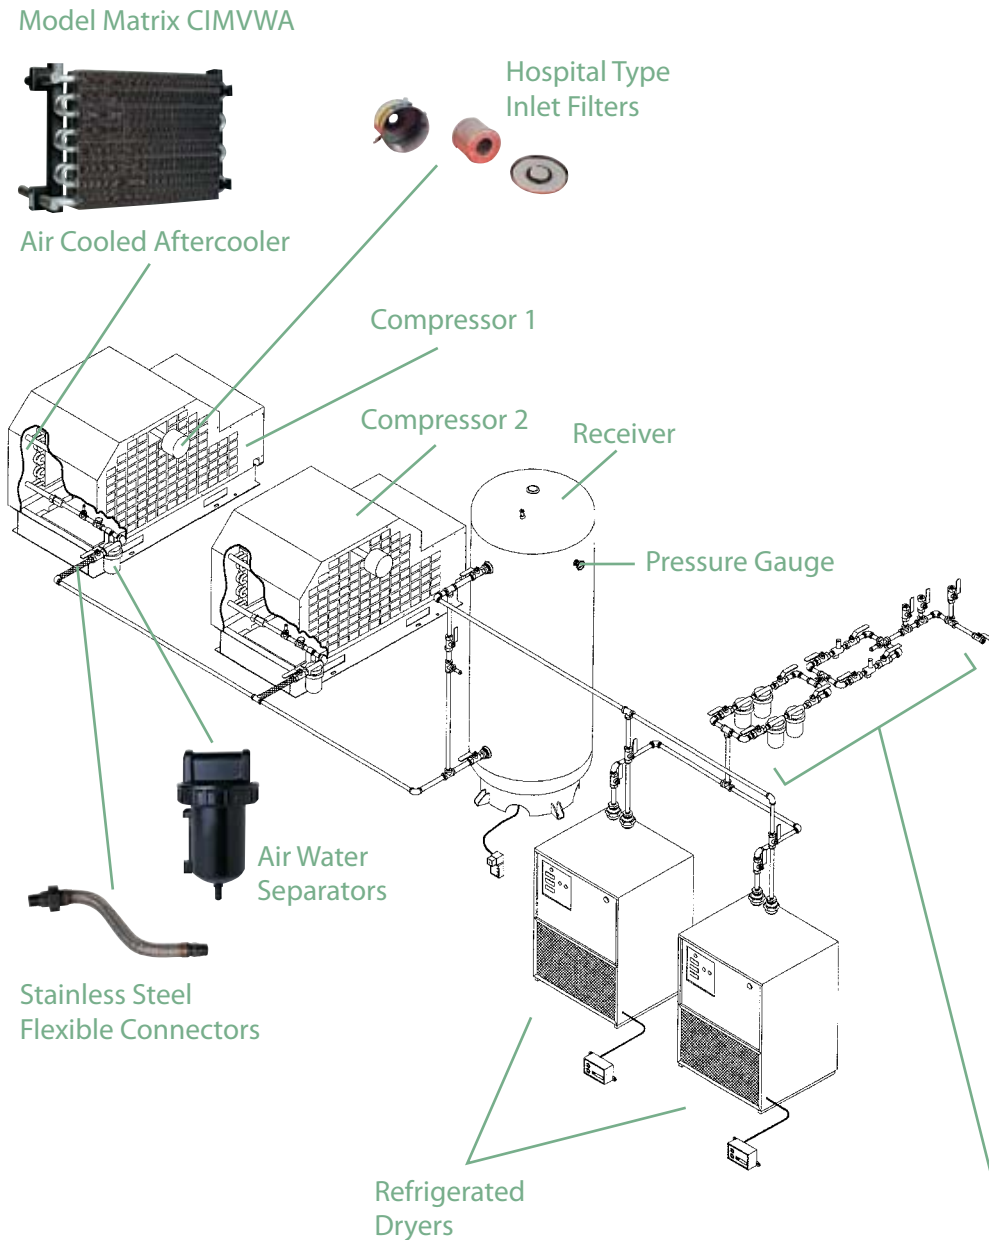

Monitors

- ▶ Dewpoint Monitor
- ▶ CO Monitors



Compare These Features

UNMATCHED IN THE INDUSTRY!



Totally Dry Crankcase

Designed to maintain continuous operation. Finned to maximize efficient heat transfer. Large cover provides easy access to internal parts for service.



Bearings

Long-lasting ball bearing design; 100% oil-less. 10,000-hour life on drive set bearings, 20,000 hours on main bearings.

Crankshaft

Cantilevered crankshaft design provides superior balance and long life.



Valves

Plated valve plates and reeds of highest grade Swedish steel extend operating life and durability.



Pistons

Patented design with "Iso-Temp" coating on top to isolate piston, rings and connecting rod bearings from the full heat of compression. Provides exceptional thermal heat barrier for extended ring life - 10,000 hours or more!



100% Duty Cycle Operation

All models are rated for 100% continuous duty cycle at 100 PSIG for single-stage units and 175 PSIG for two-stage units.

Piston Rings

Designed for oil-less compressor service with three compression rings and two guide rings. Exclusive "O" ring bumper prevents axial movement of the guide rings and eliminates end wear. Formulated of filled PTFE material for long life and compatibility with the hardened nickel-plated, polished surface of the cylinder bore.



Spring-Isolated Base

Eliminates need for special foundations. Compressor and motor are mounted on a common inner base plate. This inner base is mounted on vibro-isolation springs to absorb all vibration. Meets NFPA guidelines for medical air compressors (Over-and-under unit configuration uses elastomeric vibro-isolators).



Cast-Iron Cylinders

Permanently nickel-plated and hardened to resist wear and corrosion, even under extreme operating conditions. Smooth bore, polished finish, minimizes friction and reduces heat build-up for long ring wear life.



Air-Cooled Aftercooler

(Optional) Oversized, with ample reserve for cooling discharged air to within 5 - 10 degrees of ambient temperature. Enables air dryer to work at its highest efficiency.

Specifications

Horizontal base mount, two stage, electric motor driven CIBVWA

Unit Model	HP	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
				125 PSIG	175 PSIG				
5VTR20	5	VTR	1000	16.1	15.8	4.72 & 2.56	1.97	57¼ x 37½ x 37¾	1035
7VTR20	7.5	VTR	1300	21.4	21.2	4.72 & 2.56	1.97	57¼ x 37½ x 37¾	1115
10WTR45	10	WTR	1065	36.0	35.4	4.72 & 3.54	1.97	57¼ x 37½ x 37¾	1155
15WTR45	15	WTR	1450	48.4	48.0	4.72 & 3.54	1.97	57¼ x 37½ x 37¾	1195

Horizontal base mount, single stage, electric motor driven CIBVWA

Unit Model	HP	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
				50 PSIG	100 PSIG				
5VTS35	5	VTS	740	21.7	16.8	4.72	1.97	57¼ x 37½ x 37¾	1030
7VTS35	7.5	VTS	1065	31.6	25.9	4.72	1.97	57¼ x 37½ x 37¾	1105
10VTS35	10	VTS	1450	43.0	35.2	4.72	1.97	57¼ x 37½ x 37¾	1120
15WTS55	15	WTS	1140	69.0	56.5	4.72	2.36	57¼ x 37½ x 37¾	1180

Horizontal tank mount, two stage, electric motor driven CISVWA

Unit Model	HP	Tank Size	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
					125 PSIG	175 PSIG				
12T5VTR20	5	120	VTR	1000	16.1	15.8	4.72 & 2.56	1.97	69 x 37½ x 67	1480
25T5VTR20	5	250	VTR	1000	16.1	15.8	4.72 & 2.56	1.97	92 x 37½ x 73	1845
12T7VTR20	7.5	120	VTR	1300	21.4	21.2	4.72 & 2.56	1.97	69 x 37½ x 67	1545
25T7VTR20	7.5	250	VTR	1300	21.4	21.2	4.72 & 2.56	1.97	92 x 37½ x 73	1910
12T10WTR45	10	120	WTR	1065	36.0	35.4	4.72 & 3.54	1.97	69 x 37½ x 67	1570
25T10WTR45	10	250	WTR	1065	36.0	35.4	4.72 & 3.54	1.97	92 x 37½ x 73	2145
12T15WTR45	15	120	WTR	1450	48.4	48.0	4.72 & 3.54	1.97	69 x 37½ x 67	1725
25T15WTR45	15	250	WTR	1450	48.4	48.0	4.72 & 3.54	1.97	92 x 37½ x 73	2145

Horizontal tank mount, single stage, electric motor driven CISVWA

Unit Model	HP	Tank Size	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
					50 PSIG	100 PSIG				
12T5VTS35	5	120	VTS	740	21.7	16.8	4.72	1.97	69 x 37½ x 67	1515
25T5VTS35	5	250	VTS	740	21.7	16.8	4.72	1.97	92 x 37½ x 73	1875
12T7VTS35	7.5	120	VTS	1065	31.6	25.9	4.72	1.97	69 x 37½ x 67	1530
25T7VTS35	7.5	250	VTS	1065	31.6	25.9	4.72	1.97	92 x 37½ x 73	1890
12T10VTS35	10	120	VTS	1450	43.0	35.2	4.72	1.97	69 x 37½ x 67	1550
25T10VTS35	10	250	VTS	1450	43.0	35.2	4.72	1.97	92 x 37½ x 73	1910
12T15WTS55	15	120	WTS	1140	69.0	56.5	4.72	2.36	69 x 37½ x 67	1720
25T15WTS55	15	250	WTS	1140	69.0	56.5	4.72	2.36	92 x 37½ x 73	2125

* Units tested in accordance with CAGI/PEUROP acceptance test code PN2CPTC2.

Vertical two stage, cabinet enclosed, electric motor driven **CICVWA**

Unit Model	HP	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
				125 PSIG	175 PSIG				
5EVTR20	5	VTR	1000	16.1	15.8	4.72 & 2.56	1.97	40 x 37 x 65 ³ / ₄	1053
7EVTR20	7.5	VTR	1300	21.4	21.2	4.72 & 2.56	1.97	40 x 37 x 65 ³ / ₄	1058
10EWTR45	10	WTR	1065	36.0	35.4	4.72 & 3.54	1.97	40 x 37 x 65 ³ / ₄	1096
15EWTR45	15	WTR	1450	48.4	48.0	4.72 & 3.54	1.97	40 x 37 x 65 ³ / ₄	1244

Vertical single stage, cabinet enclosed, electric motor driven **CICVWA**

Unit Model	HP	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
				50 PSIG	100 PSIG				
5EVTS35	5	VTS	740	21.7	16.8	4.72	1.97	40 x 37 x 65 ³ / ₄	999
7EVTS35	7.5	VTS	1065	31.6	25.9	4.72	1.97	40 x 37 x 65 ³ / ₄	1004
10EVTS35	10	VTS	1450	43.0	35.2	4.72	1.97	40 x 37 x 65 ³ / ₄	1040
15EWTS55	15	WTS	1140	69.0	56.5	4.72	2.36	40 x 37 x 65 ³ / ₄	1180

Horizontal duplex tank mount, two stage, electric motor driven **CIDVWA**

Unit Model	HP	Tank Size GA	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
					125 PSIG	175 PSIG				
12TD5VTR20	5 (2)	120	VTR	1000	32.2	31.6	4.72 & 2.56	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2575
25TD5VTR20	5 (2)	250	VTR	1000	32.2	31.6	4.72 & 2.56	1.97	84 x 67 x 72	2935
12TD7VTR20	7.5 (2)	120	VTR	1300	42.8	42.4	4.72 & 2.56	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2750
25TD7VTR20	7.5 (2)	250	VTR	1300	42.8	42.4	4.72 & 2.56	1.97	84 x 67 x 72	3110
12TD10WTR45	10 (2)	120	WTR	1065	72.0	70.8	4.72 & 3.54	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2820
25TD10WTR45	10 (2)	250	WTR	1065	72.0	70.8	4.72 & 3.54	1.97	84 x 67 x 72	3220
12TD15WTR45	15 (2)	120	WTR	1450	96.8	96.0	4.72 & 3.54	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	3060
25TD15WTR45	15 (2)	250	WTR	1450	96.8	96.0	4.72 & 3.54	1.97	84 x 67 x 72	3480

Horizontal duplex tank mount, single stage, electric motor driven **CIDVWA**

Unit Model	HP	Tank Size GA	Pump	RPM	CFM Delivery*		Bore DIA IN	Stroke IN	Dimensions L x W x H IN	WT LBS
					50 PSIG	100 PSIG				
12TD5VTS35	5 (2)	120	VTS	740	43.4	33.6	4.72	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2545
25TD5VTS35	5 (2)	250	VTS	740	43.4	33.6	4.72	1.97	84 x 67 x 72	1875
12TD7VTS35	7.5 (2)	120	VTS	1065	63.2	51.8	4.72	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2760
25TD7VTS35	7.5 (2)	250	VTS	1065	63.2	51.8	4.72	1.97	84 x 67 x 72	3125
12TD10VTS35	10 (2)	120	VTS	1450	86.0	70.4	4.72	1.97	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	2815
25TD10VTS35	10 (2)	250	VTS	1450	86.0	70.4	4.72	1.97	84 x 67 x 72	3220
12TD15WTS35	15 (2)	120	WTS	1140	138.0	113.0	4.72	2.36	88 ¹ / ₄ x 57 ¹ / ₄ x 60 ¹ / ₂	3055
25TD15WTS35	15 (2)	250	WTS	1140	138.0	113.0	4.72	2.36	84 x 67 x 72	3440

* Units tested in accordance with CAGI/PEUROP acceptance test code PN2CPTC2.

Warranty

Ensuring Dependable Performance

From design... to materials selection... to construction, the Champion team strives for perfection. Knowing the critical necessity for an uninterrupted supply of oil-less compressed air, Champion craftsmen take the extra care needed to ensure trouble-free operation and economical performance. At every step of the manufacturing process, stringent inspection procedures assure accuracy and future dependability. Rigid testing determines if the Champion symbol of excellence can be assigned to the final product. Others have copied, none have equaled, the strict standards established by Champion. Though users have little need for the warranty that backs each Champion product, an extended three year warranty is provided.

Champion Warranty V & W Series Oil-less compressors

Champion warrants each new V & W Series oil-less compressor pump manufactured by Champion to be free from defects in material and workmanship under normal use and service for a period of thirty-six (36) months maximum or specified number of operating hours, whichever may occur first. This applies to the compressor pumps ONLY, excluding head valves which are warranted for the first year only. The unit is warranted for one year after start-up, or 18 months after shipment, whichever occurs first.

Warranty hours for pump components are as follows:

- | | |
|--|-------------------------|
| ▶ Compression Rings and Guide Rings | 10,000 hours or 3 years |
| ▶ Driving Set (sealed ball bearings mounted in connecting rod) | 10,000 hours or 3 years |
| ▶ Piston Set | 10,000 hours or 3 years |
| ▶ Crankshaft Bearing Set | 20,000 hours or 3 years |
| ▶ Reed Valves | 5,000 hours or 1 year |

5 Year Electric Motor Warranty

The above applies to Champion manufactured compressor units only.

All Units Built to ISO 9001 Standards.

CHAMPION[®]

A Gardner Denver Product

1301 North Euclid Avenue
Princeton, Illinois 61356 USA
Phone 888/436-5499
Fax 815/872-0421
E-mail: Champion@championpneumatic.com
www.ChampionPneumatic.com

© 2007 Gardner Denver, Inc.
Printed in U.S.A.
CR-VW-100 1st Ed. 7/07
Supercedes C1-3-5-215 3rd Ed. 4/06

Due to Champion's continuing product development program, specifications and materials are subject to change without notice or obligation.

